

A13T Temperature Humidity Meter

Introduction

A13T is a digital temperature humidity meter with date and clock display. It is handy, easy-to-use, reliable and low power consumption. This meter is applicable in various occasions, such as homes, labs, offices, hotels, schools, shopping malls, hospitals, airports and restaurants.

1. Function

- Temperature/humidity
- °C/°F unit selectable
- Time clock: YYYY-MM-DD-Week-Time (12/24 selectable)
- On time alarm
- Alarm clock

2. Specification


Function	Range	Resolution	Accuracy	Sampling rate	Remark
Temperature	-10~50°C	0.1°C	±1°C	10s	0~40°C:±1°C, Other:±2°C
	14~122°F	0.2°F	±2°F		32~104°F:±2°F, Other:±4°F
Humidity	20~95%RH	1%RH	±5%RH	10s	Ambient environment: (40~80%: ±5%RH, Other: ±8%RH)

Battery: 1.5V (AAA)

Storage temperature: -20~60°C (-4~140°F)

Storage humidity: 20~80%RH


3. Structure

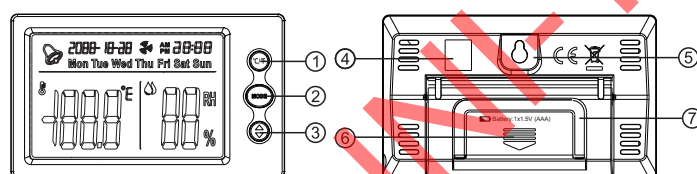

1	°C/°F	5	Wall mount
2	MODE	6	Bracket
3	Adjust	7	Battery cover
4	QR code		

Buttons	Operation
MODE	Short press to switch between time clock and alarm clock When time clock is shown, long press to setup the time clock and date. When alarm clock is shown, long press to setup the alarm clock.
°C/°F	Short press to switch the temperature unit.
▲ ▼	During setting up, adjust the parameter. (Long press for fast adjustment) When it is not in setting mode, short press to turn on/off the alarm clock.

4. Symbols

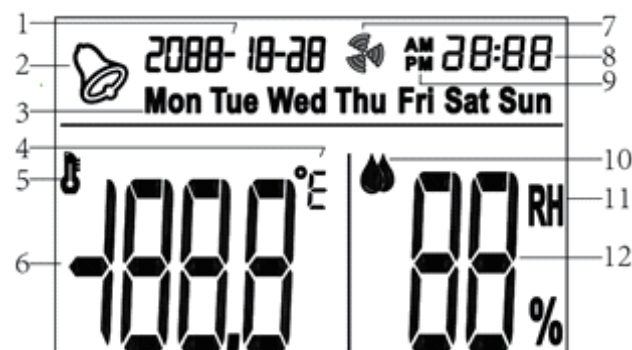

1	Date	7	On time alarm icon
2	Alarm clock	8	Time
3	Day	9	AM/PM
4	Temperature unit (°C/°F)	10	Humidity icon
5	Temperature icon	11	Humidity unit
6	Temperature value	12	Humidity value

5. Setup

Time mode

During time setup, colon between hour and minute flickers

Short press MODE to switch to alarm mode

Long press MODE to enter into time setup, setting sequence:
12/24-Hour-Minute-Year-Month-Day-Confirm.

⚠ Note: During setting up, if there is no operation within 10s, the device will automatically save the setting.

Alarm clock mode

During alarm setup, a solid colon will appear between hour and minute.

Short press MODE: switch to time mode

Long press MODE to enter alarm setting, press ▲ to adjust hour, then press MODE to minute, press ▼ to adjust minute, then press MODE to confirm the setting.

⚠ Note: During setting up, if there is no operation within 10s, the device will automatically save the setting. If there is no operation within 1 minute, the device will automatically return to time clock mode.

Precautions

1. Please reset the time clock at first use or after battery replacement.
2. Please place the empty batteries to recycle bin.

UNI-T®

UNI-TREND TECHNOLOGY (CHINA) CO., LTD.

No6, Gong Ye Bei 1st Road,
Songshan Lake National High-Tech Industrial
Development Zone, Dongguan City,
Guangdong Province, China
Tel: (86-769) 8572 3888
<http://www.uni-trend.com>