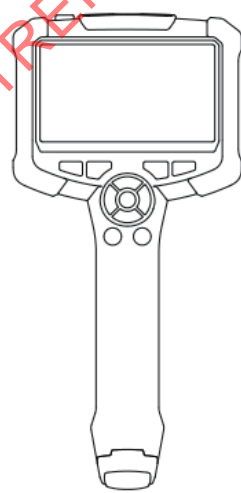
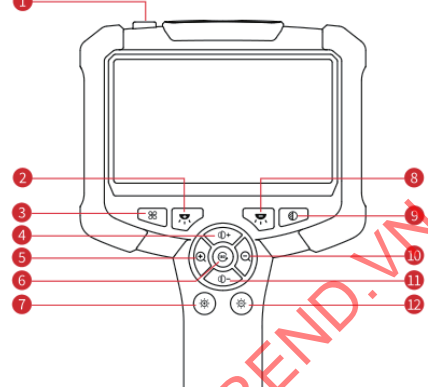

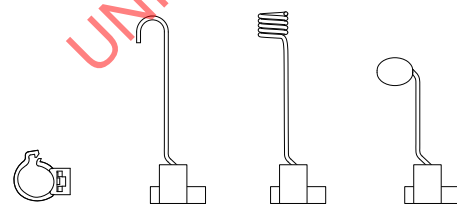
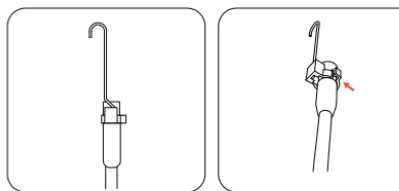



<div>Handheld Single Lens Industrial Borescope</div> <div>User Manual</div> <div></div> <div>UT665P UT665P-5m UT665P-10m</div> <div>Please read the User Manual carefully before your using!</div>	<div>PREFACE</div> <div>Thank you for purchasing the new Handheld Single Lens Industrial. In order to use this product safely and correctly, please read this manual thoroughly. After reading this manual, it is recommended to keep the manual in an easily accessible place, preferably close to the device, for future reference.</div> <div>LIMITED WARRANTY AND LIABILITY</div> <div>Uni-Trend guarantees that the product is free from any defect in material and workmanship within one year from the purchase date. This warranty does not apply to damages caused by accident, negligence, misuse, modification, contamination and improper handling. The dealer shall not be entitled to give any other warranty on behalf of Uni-Trend. If you need warranty service within the warranty period, please contact authorized service center or send the product back with problem description. This warranty is the only compensation you can obtain. Uni-Trend will not be responsible for any special, indirect, incidental or subsequent damage or loss caused by any reason or speculation. As some areas or countries do not allow limitations on implied warranties and incidental or subsequent damage, the above limitation of liability and stipulation may not apply to you.</div>	<div>Safety & Maintenance</div> <div><ul style="list-style-type: none">Do not hit the Lens violently. Do not pull the cables so hard.Be careful to use the device in somewhere rough and uneven, and avoid scratching the waterproof layer of probe.The Lens probe is not made from heat-resistant materials, so please cool down the temperature of engine to be normal when inspect it.Keep the Lens and device clean and dry when not using, to avoid contacting any oil contaminations or other corrosives.The product is not suitable for users who are limited in body health, sensory ability or spirit ability.Do not let children contact and operate the device.Do not disassemble the device randomly and contact sellers for maintenance service if any damaged.The product is for industrial borescope use, and not suitable for medical use or body check.</div>	<div>Battery</div> <div><ul style="list-style-type: none">Please charge the device via the home charger meets safety requirements (5V=1A).The device is supported to be used in the charging process.When the device is not used for a long time, charge it at least once every three months, to avoid unrecoverable damage caused by over-discharge.</div>	<div>Functions</div> <div></div> <table><tr><td>1</td><td>POWER Button (Long press 2-3s to power on/off)</td></tr><tr><td>2</td><td>Increase Screen Brightness (10-25-50-75-100%, increasing)</td></tr><tr><td>3</td><td>Restore the Factory Settings (Reset the settings to the original state)</td></tr><tr><td>4</td><td>Contrast Increase (Lessen-Normal-Enhance) (Increasing)</td></tr><tr><td>5</td><td>Zoom In (1.0-1.5-2.0x, increasing)</td></tr><tr><td>6</td><td>Rotate Images/Switch Lens (180° image rotation, Dual-Lens: long press to switch front/side Lens.)</td></tr><tr><td>7</td><td>Turn Light Up (0-60-80-100%, increasing)</td></tr><tr><td>8</td><td>Decrease Screen Brightness (100-75-50-25-10%, decreasing)</td></tr><tr><td>9</td><td>Black-White Mode (Color and Black-White, In Cycle)</td></tr><tr><td>10</td><td>Zoom Out (2.0-1.5-1.0x, decreasing)</td></tr><tr><td>11</td><td>Contrast Decrease (Enhance-Normal-Lessen) (decreasing)</td></tr><tr><td>12</td><td>Turn Light Down (100-80-60-0%) (decreasing)</td></tr></table>	1	POWER Button (Long press 2-3s to power on/off)	2	Increase Screen Brightness (10-25-50-75-100%, increasing)	3	Restore the Factory Settings (Reset the settings to the original state)	4	Contrast Increase (Lessen-Normal-Enhance) (Increasing)	5	Zoom In (1.0-1.5-2.0x, increasing)	6	Rotate Images/Switch Lens (180° image rotation, Dual-Lens: long press to switch front/side Lens.)	7	Turn Light Up (0-60-80-100%, increasing)	8	Decrease Screen Brightness (100-75-50-25-10%, decreasing)	9	Black-White Mode (Color and Black-White, In Cycle)	10	Zoom Out (2.0-1.5-1.0x, decreasing)	11	Contrast Decrease (Enhance-Normal-Lessen) (decreasing)	12	Turn Light Down (100-80-60-0%) (decreasing)																																																				
1	POWER Button (Long press 2-3s to power on/off)																																																																															
2	Increase Screen Brightness (10-25-50-75-100%, increasing)																																																																															
3	Restore the Factory Settings (Reset the settings to the original state)																																																																															
4	Contrast Increase (Lessen-Normal-Enhance) (Increasing)																																																																															
5	Zoom In (1.0-1.5-2.0x, increasing)																																																																															
6	Rotate Images/Switch Lens (180° image rotation, Dual-Lens: long press to switch front/side Lens.)																																																																															
7	Turn Light Up (0-60-80-100%, increasing)																																																																															
8	Decrease Screen Brightness (100-75-50-25-10%, decreasing)																																																																															
9	Black-White Mode (Color and Black-White, In Cycle)																																																																															
10	Zoom Out (2.0-1.5-1.0x, decreasing)																																																																															
11	Contrast Decrease (Enhance-Normal-Lessen) (decreasing)																																																																															
12	Turn Light Down (100-80-60-0%) (decreasing)																																																																															
<div>Charging Guideline</div> <div></div> <div><ol style="list-style-type: none">Charge the device via the Type-C adapter (5V=1A), and fast charge is not supported.During the charging, LED lights up in solid red.When it is fully charged, LED lights up in solid green. (Please charge the device via the Type-C cable.)</div> <div>FAQ</div> <div><ol style="list-style-type: none">The image output is freezing up Check the battery status of device, or restart the device.Unclear imaging The optimum imaging focus is 2cm-10cm, please align the device with the target, or use a clean alcohol cloth to wipe the front-end of Lens.Charge Please charge the device via the charger (5V=1A), and fast charge is not supported.Lens overheated The Lens overheat phenomenon is commonly seen, especially in the highest LED brightness of Lens, but without affecting the normal use or service life.</div>	<div>Accessory Installation Guideline</div> <div>Accessories: Fixed Buckle*1, Hook*1, Magnet*1, Side Mirror*1</div> <div></div> <div>Installation Diagram</div> <div></div>	<div>Specification</div> <table><tr><td>Models</td><td>UT665P</td><td>UT665P-5m</td><td>UT665P-10m</td></tr><tr><td rowspan="2">System</td><td>Screen Size</td><td colspan="2">4.3"</td></tr><tr><td>System Languages</td><td colspan="2">English</td></tr><tr><td rowspan="2"></td><td>Screen Pixels</td><td colspan="2">1280*720</td></tr><tr><td>Basic Functions</td><td colspan="2">Screen rotation, Contrast adjustment, Black-white images, Color conversion, Image zoom-in and zoom-out, Screen brightness adjustment.</td></tr><tr><td rowspan="2">Hose</td><td>Hose Material</td><td colspan="2">The hardware with aviation plug can be changed</td></tr><tr><td>Hose Length</td><td>1m</td><td>5m</td><td>10m</td></tr><tr><td rowspan="7">Lens</td><td>Lens Diameter</td><td colspan="3">8mm</td></tr><tr><td>Light Sensor Chip</td><td colspan="3">CMOS</td></tr><tr><td>Field of View (FOV)</td><td colspan="3">70°</td></tr><tr><td>Depth of Field (DOF)</td><td colspan="3">20~100mm</td></tr><tr><td>Adjustable LED Lights</td><td colspan="3">4-Setting, 8 LEDs</td></tr><tr><td>Chips</td><td colspan="3">350K</td></tr><tr><td>IP Rating</td><td colspan="3">IP67</td></tr><tr><td rowspan="2">Battery</td><td>Battery</td><td colspan="3">3.7V/2000mAh</td></tr><tr><td>Battery Life</td><td colspan="3">6h</td></tr><tr><td rowspan="3">Working Conditions</td><td>Lens Temperature</td><td colspan="3">0°C~80°C</td></tr><tr><td>Temperature</td><td colspan="3">0°C~45°C</td></tr><tr><td>Humidity</td><td colspan="3"><90%RH, No condensation</td></tr></table> <div>Accessories List: Handheld Single Lens Industrial Borescope*1, Type-C Cable*1, Gift Box*1, User Manual*1, Blister Tray*1, Hook*1, Side Mirror*1, Magnet*1, Fixed Buckle*3.</div> <div>The manual is subject to change without prior notice! Due to different batches, the materials and details of actual products may be slightly different from the graphic information, please refer to the actual product received. Experimental data provided in the page is from internal laboratory of UNI-T, but it should not be a reference for customer to place orders. Any questions, please contact the customer service, thanks!</div>	Models	UT665P	UT665P-5m	UT665P-10m	System	Screen Size	4.3"		System Languages	English			Screen Pixels	1280*720		Basic Functions	Screen rotation, Contrast adjustment, Black-white images, Color conversion, Image zoom-in and zoom-out, Screen brightness adjustment.		Hose	Hose Material	The hardware with aviation plug can be changed		Hose Length	1m	5m	10m	Lens	Lens Diameter	8mm			Light Sensor Chip	CMOS			Field of View (FOV)	70°			Depth of Field (DOF)	20~100mm			Adjustable LED Lights	4-Setting, 8 LEDs			Chips	350K			IP Rating	IP67			Battery	Battery	3.7V/2000mAh			Battery Life	6h			Working Conditions	Lens Temperature	0°C~80°C			Temperature	0°C~45°C			Humidity	<90%RH, No condensation			<div></div> <div>UNI-T UNI-TREND TECHNOLOGY (CHINA) CO., LTD. No.6, Gong Ye Bei 1st Road, Songshan Lake National High-Tech Industrial Development Zone, Dongguan City, Guangdong Province, China Tel: (86-769) 8572 3888 http://www.uni-trend.com</div>
Models	UT665P	UT665P-5m	UT665P-10m																																																																													
System	Screen Size	4.3"																																																																														
	System Languages	English																																																																														
	Screen Pixels	1280*720																																																																														
	Basic Functions	Screen rotation, Contrast adjustment, Black-white images, Color conversion, Image zoom-in and zoom-out, Screen brightness adjustment.																																																																														
Hose	Hose Material	The hardware with aviation plug can be changed																																																																														
	Hose Length	1m	5m	10m																																																																												
Lens	Lens Diameter	8mm																																																																														
	Light Sensor Chip	CMOS																																																																														
	Field of View (FOV)	70°																																																																														
	Depth of Field (DOF)	20~100mm																																																																														
	Adjustable LED Lights	4-Setting, 8 LEDs																																																																														
	Chips	350K																																																																														
	IP Rating	IP67																																																																														
Battery	Battery	3.7V/2000mAh																																																																														
	Battery Life	6h																																																																														
Working Conditions	Lens Temperature	0°C~80°C																																																																														
	Temperature	0°C~45°C																																																																														
	Humidity	<90%RH, No condensation																																																																														