



Data Sheet

UTG1000X Series Function/Arbitrary Waveform Generator

V1.1


2024.06

Product Features

- Two channels with the maximum frequency output 40 MHz, the maximum output amplitude 20 Vpp
- 200 MSa/s sampling rate and 16-bit vertical resolution
- Square wave with the maximum frequency 20 MHz, low jitter
- Multiple analog and digital modulation function: AM, FM, PM, ASK, FSK, PSK and PWM
- Supporting sweep frequency and pulse string output
- Arbitrary wave can generate by the Any waveform editor
- Built-in power pre-amplifier, the maximum power output 4 W (only for-PA model)
- 7-bit hard frequency meter
- Built-in 200 arbitrary waves
- Standard USB Host and USB Device
- 4.3-inch high resolution TFT LCD


UNI-TREND.VN

Dual-channel Output with Same Function

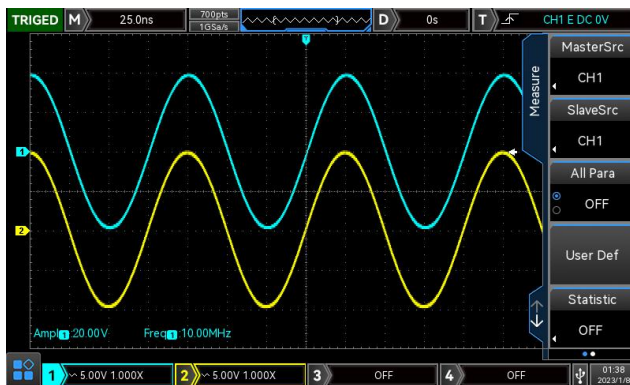


Large output capability at high frequency: 20 Vpp full amplitude output of dual-channel can still be guaranteed at 10 MHz frequency.

Power Amplifier Output

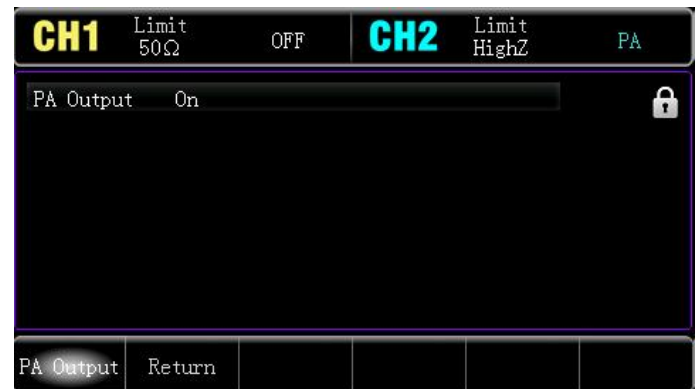


The power amplifier (on -PA model only) can boost the out to a maximum of 4 W, up to 100 kHz with a slew rate greater than 18 V/ μ s.

Low-distortion Output

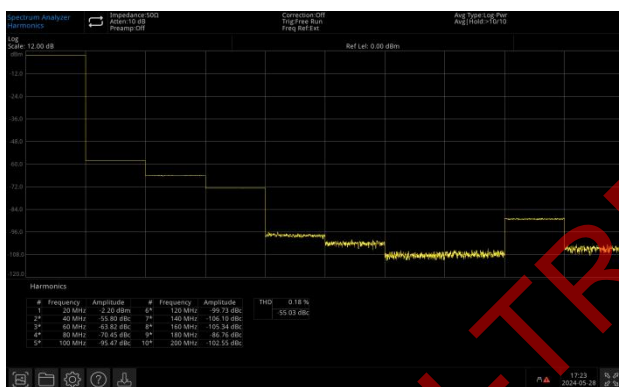


THD (total harmonic distortion) in output amplitude 0 dBm is less than 0.2%; Harmonic wave and stray in full frequency band are all less than -50 dBc.

Low Jitter

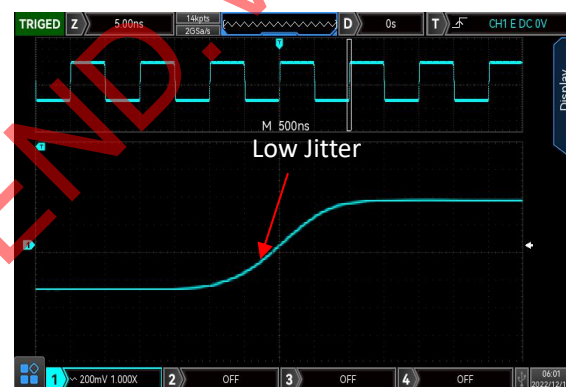

Excellent digital sampling technology to make output wave jitter more lower.


Editing Interface of Arbitrary Wave

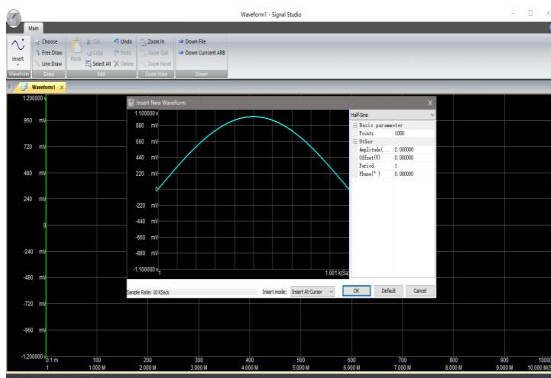

The arbitrary waveform editor has diversified generating method. The arbitrary waveform can be generated by insert the standard waveform or freely drawing


Instruments.uni-trend.com

High Signal to Noise Ratio

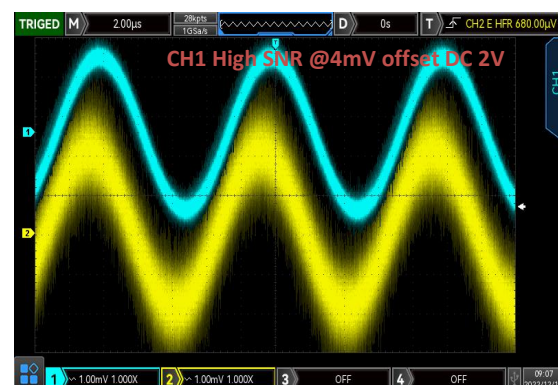


Set small signal superimposed large DC, UTG1000X output noise is lower, with higher SNR.

Multiple Modulation Function

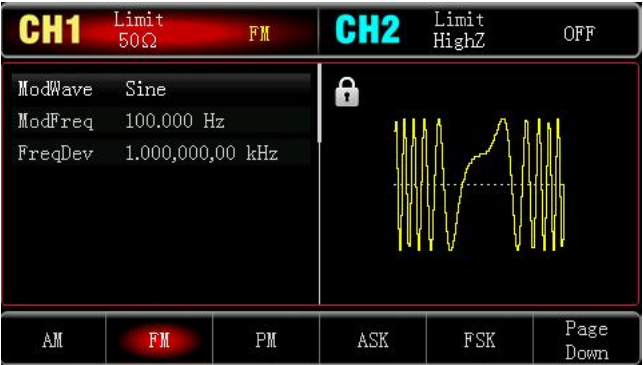


Supports multiple analog and digital modulation AM, FM, PM, FSK, ASK, PSK and PWM.

Frequency Sweep

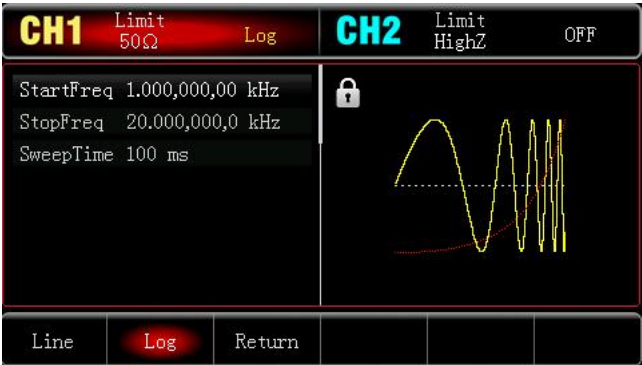

Supports two frequency sweep modes: “Linear” and “Logarithmic”.

Pulse String Function

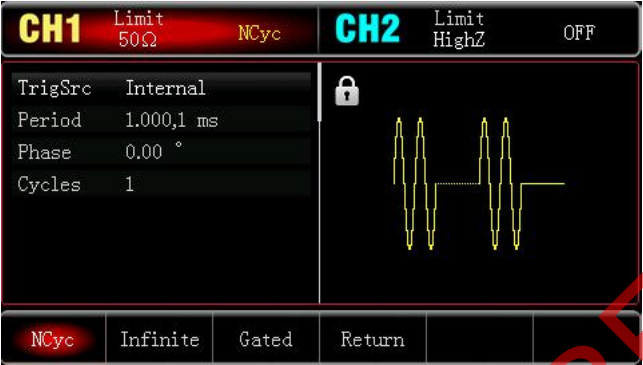

Supports pulse string mode: “N cycle”, “Gating”. “Infinite” Two modulation signal sources: “Internal” and “External”.

Frequency Meter



High precision frequency meter, frequency range within 100 mHz to 200 MHz can be measured.

Definition and Condition

- "Technical Index" provide a detailed description of the performance of the parameters which involved in the product warranty. Unless otherwise specified, these specifications are applicable to the temperature range from 18 °C to 28 °C.
- "Typical Value" refers to other product performance information which not covered in the product warranty. When the performance exceeds the technical index, 80% of the units can exhibit 95% confidence in the temperature range of 18 °C to 28 °C. Typical performance does not include uncertainty of measurement.
- "Nominal Value" means the expected performance or describes the performance of the product that is useful in the application of the product but is not included in the scope of the product warranty.
- Under the following conditions, it can achieve its technical indicators:
In the calibration cycle and has been warmed up for at least 30 minutes. If the device is stored in an environment that is within the allowable storage temperature range but exceed the allowable operating temperature range, the instrument must be placed within the allowable operating temperature range for at least two hours

Product Function and Model Comparison Table

| Mode | UTG1022X | UTG1022X-PA | UTG1042X |
|-----------------|----------|-------------|----------|
| Power amplifier | × | ● | × |

Remarks: ● indicates standard × indicates not support

Basic Waveform Characteristics

All analog channel output related specifications is suitable for channel 1 and channel 2.

Fundamental wave characteristic

| Model | UTG1022X/-PA | UTG1042X |
|-------------------------|-----------------------------------------------------------------------------------------|----------|
| Channel | Dual channel | |
| Sampling rate | 200 MSa/s | |
| Vertical resolution | 16-bit | |
| Waveform characteristic | 6 standard waveforms, 200 built-in arbitrary waveforms | |
| Waveform | Sine, Square, Ramp, Pulse, Noise, DC, Arb, AM, FM, PM, ASK, FSK, PSK, PWM, Sweep, Burst | |
| Working modes | Output gating, Continuous, Modulation, Frequency Sweep, Burst | |
| LCD | 4.3" TFT LCD, WVGA (480×272) | |

Frequency characteristic

| | | |
|-----------|-----------------|-----------------|
| Sine wave | 1 μHz to 20 MHz | 1 μHz to 40 MHz |
|-----------|-----------------|-----------------|

| | | |
|----------------------------------------|------------------------------------------------------------------|--------------------------------------------------------------|
| Square wave | 1 μ Hz to 10 MHz | 1 μ Hz to 20 MHz |
| Pulse wave | 1 μ Hz to 10 MHz | 1 μ Hz to 20 MHz |
| Ramp wave | 1 μ Hz to 400 kHz | 1 μ Hz to 1 MHz |
| Gauss noise | 40 MHz (-3dB) (typical value) | |
| Resolution | 1 μ Hz | |
| Reference frequency | Initial accuracy | < 30 ppm |
| | Temperature stability | \pm 2 ppm/ $^{\circ}$ C, 0 $^{\circ}$ C to 40 $^{\circ}$ C |
| | Aging rate | \pm 50 ppm, First year aging rate |
| Sine wave | | |
| Harmonic distortion | Typical value (0 dBm) | DC to 1 MHz: -60 dBc |
| | | 1 MHz to 10 MHz: -55 dBc |
| | | 10 MHz to 40 MHz: -50 dBc |
| THD | < 0.2% (DC to 20 kHz, 1 Vpp) | |
| Spurious signals (anharmonic) | Typical value (0 dBm) | \leq 10 MHz < -70 dBc |
| | | > 10 MHz < -70 dBc+6 dB/octave |
| Phase noise(typical) | 1 MHz: \leq -125 dBc/Hz (typical, 0 dBm, 10 kHz deviation) | |
| Square wave | | |
| Rise/fall time(1 Vpp, 50 Ω) | < 16 ns | |
| Overshoot(100 kHz, 1Vpp, 50 Ω) | < 2% (typical, 50 Ω) | |
| Duty ratio | 0.000 % to 100.00 % (limited by current frequency) | |
| Symmetry (duty ratio=50%) | 1 % of period + 4 ns | |
| Shake (RMS) | Typical (1 MHz,1 Vpp, 50 Ω) | \leq 5 MHz: 2 ppm + 200 ps |
| | | > 5 MHz: 200 ps |
| Ramp wave | | |
| Nonlinearity | < 1% of peak output (typical value, 1 kHz, 1 Vpp, symmetry 100%) | |
| Symmetry | 0.0% to 100.0% | |
| Pulse wave | | |
| Minimum pulse width | 22 ns | |
| Variable edge | 15 ns to 10 s | |
| Overshoot | < 2% (typical, 1 Vpp) | |
| Shake | 150 ps | |
| Arbitrary wave | | |
| Frequency | 1 μ Hz to 5 MHz | 1 μ Hz to 10 MHz |
| Wave length | 4 kpts | |
| Vertical resolution | 16-bit (symbol included) | |

| | |
|---------------------|-----------------|
| Sampling range | 200 MSa/s (DDS) |
| Nonvolatile storage | 200 waves |

Output Characteristic

| Output | | | |
|--------------------|---------------------------------------------------------------------------------------|------------------|----------|
| Amplitude (50Ω) | ≤20 MHz: 1 mVpp to 10 Vpp | | |
| | ≤40 MHz: 1 mVpp to 5 Vpp | | |
| Amplitude (HighZ) | ≤20 MHz: 2 mVpp to 20 Vpp | | |
| | ≤40 MHz: 2 mVpp to 10 Vpp | | |
| Accuracy | Typical value(1 kHz,sine wave, 0 V, deviation, ± (1 % of set value+2 mVpp) > 10 mVpp) | | |
| Amplitude flatness | Typical value (sine wave, 0 dBm) | ≤20 MHz: ±0.3 dB | |
| | | ≤40 MHz: ±0.5 dB | |
| Power output | | | |
| Model | UTG1022X | UTG1022X-PA | UTG1042X |
| Frequency | × | 1 μHz to 100 kHz | × |
| Output power | × | 4 W | × |
| DC offset | | | |
| Range(peak AC+DC) | ±5 V (50Ω) | | |
| | ±10 V (high resistance) | | |
| Accuracy of offset | Offset set value ±1% ± amplitude set value 2% ± 2 mV | | |
| Waveform output | | | |
| Impedance | 50Ω typical value | | |
| Protection | Overvoltage protection, overload automatically disables waveform output | | |

Modulation Types

| AM | |
|----------------------|----------------------------------------------------------|
| Carrier wave | Sine wave, square wave, ramp wave, arbitrary wave |
| Source | Internal |
| Modulation wave | Sine wave, square wave, ramp wave, noise, arbitrary wave |
| Modulation depth | 0% to 120% |
| Modulation frequency | 2 mHz to 1 MHz |
| FM | |

| | | |
|----------------------|----------------------------------------------------------|--------------|
| Carrier wave | Sine wave, square wave, ramp wave, arbitrary wave | |
| Source | Internal | |
| Modulation wave | Sine wave, square wave, ramp wave, noise, arbitrary wave | |
| Frequency deviation | DC to 10 MHz | DC to 20 MHz |
| Modulation frequency | 2 mHz to 1 MHz | |

PM

| | | |
|----------------------|----------------------------------------------------------|--|
| Carrier wave | Sine wave, square wave, ramp wave, arbitrary wave | |
| Source | Internal | |
| Modulation wave | Sine wave, square wave, ramp wave, noise, arbitrary wave | |
| Phase deviation | 0 to 360° | |
| Modulation frequency | 2 mHz to 1 MHz | |

ASK

| | | |
|----------------------|---------------------------------------------------|--|
| Carrier wave | Sine wave, square wave, ramp wave, arbitrary wave | |
| Source | Internal/external | |
| Modulation wave | Square wave (Duty ratio 50%) | |
| Modulation frequency | 2 mHz to 100 kHz | |

FSK

| | | |
|----------------------|---------------------------------------------------|--|
| Carrier wave | Sine wave, square wave, ramp wave, arbitrary wave | |
| Source | Internal/external | |
| Modulation wave | Square wave (Duty ratio 50%) | |
| Modulation frequency | 2 mHz to 100 kHz | |

PSK

| | | |
|----------------------|---------------------------------------------------|--|
| Carrier wave | Sine wave, square wave, ramp wave, arbitrary wave | |
| Source | Internal/external | |
| Modulation wave | Square wave (Duty ratio 50%) | |
| Modulation frequency | 2 mHz to 100 kHz | |

PWM

| | | |
|----------------------|----------------------------------------------------------|--|
| Carrier wave | Pulse | |
| Source | Internal/external | |
| Modulation wave | Sine wave, square wave, ramp wave, noise, arbitrary wave | |
| PWM range | 0% to 50.00% | |
| Modulation frequency | 2 mHz to 1 MHz | |

Frequency sweep

| | | |
|----------------------|---------------------------------------------------|--|
| Carrier wave | Sine wave, square wave, ramp wave, arbitrary wave | |
| Type | Linear or logarithmic | |
| Frequency sweep time | 1 ms to 500 s \pm 0.1% | |

| | |
|--------------------------|--------------------------------------------------------------------|
| Trigger source | Internal |
| Burst | |
| Mode of pulse train | N cycle, infinite, gated |
| Waveform | Sine wave, square wave, ramp wave, pulse, noise and arbitrary wave |
| Source | Internal/external |
| Trigger edge | Rising edge/falling edge |
| Internal cycle | 1 μ s to 500 s |
| Recurring number | 1 to 50,000 |
| Polarity | Positive and negative (TTL level input) |
| Initial and stop phase | 0 to 360° |
| Frequency meter | |
| Range of input frequency | 100 mHz to 200 MHz |
| Input level | TTL compatible |
| Accuracy | 7-bit |

Interface and Display

| | |
|------------------------|----------------------------------------------|
| Interface | |
| Standard configuration | USB Host, USB Device, Power Output (only-PA) |
| Display screen | |
| Display Type | 4.3 inches TFT LCD |
| Display resolution | WVGA (480×272) |

General Technical Specifications

| | |
|-----------------------|---------------------------------------------------------------------------------------------------------------|
| Specifications | |
| Supply voltage | 100 to 240 VAC (Fluctuations: $\pm 10\%$), 50 Hz/60Hz; 100 to 120 VAC (Fluctuations: $\pm 10\%$), 400 Hz |
| Power consumption | < 20 W |
| Fuse | 2 A, Class T, 250 V |
| Environment | |
| Temperature range | Operation: +10 °C to +40 °C Non operational: -20 °C to +60 °C |
| Cooling method | Natural cooling |
| Humidity range | +35 °C Below: $\leq 90\%$ relative humidity +35 °C to +40 °C: $\leq 60\%$ relative humidity |
| Altitude | Operating below 2,000 m |

Non-operating below 15,000 m

| | |
|-----------------------|--------|
| Class of pollution | 2 |
| Operating environment | indoor |

Mechanical specifications

| | |
|-------------------|------------------------------------------------|
| Dimensions | 215mm×103mm×316mm (Width x Height x Length) |
| Net weight | 2.2 kg |
| Calibration cycle | The recommended calibration circle is one year |

Regulatory standards

| | | |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC | Compliance with EMC directives(2014/30/EU), Conform to or better than IEC 61326-1:2021/EN61326-1:2021, IEC 61326-2-1:2021/EN61326-2-1:2021 | |
| Conductive disturbance | CISPR 11/EN 55011 | CLASS B group 1, 150kHz-30MHz |
| Radiation disturbance | CISPR 11/EN 55011 | CLASS B group 1, 30MHz-1GHz |
| Electrostatic discharge (ESD) | IEC 61000-4-2/EN 61000-4-2 | 4.0 kV (Contact), 8.0 kV (air) |
| Radio frequency electromagnetic field immunity | IEC 61000-4-3/EN 61000-4-3 | 0 V/m (80 MHz to 1 GHz) ; 3 V/m (1.4 GHz to 2 GHz) ; 1 V/m (2.0 GHz to 2.7GHz) |
| Electrical fast transient burst (EFT) | IEC 61000-4-4/EN 61000-4-4 | 2 kV (AC input port) |
| Surge | IEC 61000-4-5/EN 61000-4-5 | 1 kV (Live line to zero line) 2 kV (Fire/zero line to ground) |
| Immunity to RF continuous conduction | IEC 61000-4-6/EN 61000-4-6 | 3 V, 0.15-80 MHz |
| Voltage dips and short interruptions | IEC 61000-4-11/EN 61000-4-11 | Voltage dip: 0% UT during 1 cycle; 40% UT during 10/12 cycles; 70% UT during 25/30 cycles Short Interruption: 0% UT during 250/300 cycles |

Safety regulations

EN 61010-1:2010+A1:2019
 EN IEC61010-2-030:2021+A11:2021
 BS EN61010-1:2010+A1:2019
 BS EN IEC61010-2-030:2021+A11:2021
 UL 61010-1:2012 Ed.3+ R:19 Jul2019
 UL 61010-2-030:2018 Ed.2
 CSA C22.2#61010-1:2012 Ed.3+U1;U2;A1
 CSA C22.2#61010-2-030:2018 Ed.2

Ordering Information

| | Description | Order No. |
|----------------------|--------------------------------------------|-------------|
| Models | Maximum output frequency 20 MHz | UTG1022X |
| | Maximum output frequency 40 MHz | UTG1042X |
| | Maximum output frequency 20 MHz ,4 W PA | UTG1022X-PA |
| Standard accessories | Power cord x 1 | |
| | USB cable x 1 | UT-D14 |
| | BNC-BNC x 1 | UT-L45 |
| | BNC--red and black alligator clip cable x1 | UT-L02A |
| Recommended options | 10 W Power amplifier option | UT-M14 |

Remarks: All mainframe, accessories, optional can order from the local UNI-T distributor.

UNI-TREND.VN

Limited Warranty and Liability

Uni-T guarantees that the Instrument product is free from any defect in material and workmanship within three years from the purchase date. This warranty does not apply to damages caused by accident, negligence, misuse, modification, contamination or improper handling. If you need warranty service within the warranty period, please contact your seller directly. Uni-T will not be responsible for any special, indirect, incidental or subsequent damage or loss caused by using this device. For the probes and accessories, the warranty period is one year. Visit instrument.uni-trend.com for full warranty information.



Learn more at: www.uni-trend.com



Register your product to confirm your ownership. You will also get product notifications, update alerts, exclusive offers and all the latest information you need to know.

UNI-T is the licensed trademark of UNI-TREND TECHNOLOGY CO., Ltd. The product information in this document subject to update without notice. For more information on UNI-T Test & Measure Instrument products, applications or service, please contact UNI-T instrument for support, the support center is available on www.uni-trend.com ->instruments.uni-trend.com
<https://instruments.uni-trend.com/ContactForm/>

Headquarter

Addresses: No6, Gong Ye Bei 1st
Road. Songshan Lake National
High-Tech Industrial Development
Zone, Dongguan City, Guangdong
Province, China
Tel: (86-769) 8572 3888

Europe

UNI-TREND TECHNOLOGY EU
GmbH
Addresses: Affinger Str. 12
86167 Augsburg Germany
Tel: +49 (0)821 8879980

North America

Uni-Trend Technology US INC.
Addresses: 3171 Mercer Ave STE
104, Bellingham, WA 98225
Tel: +1-888-668-8648